

INTRODUCTION

Our factory Dalian Golden House Door & Window Manufacture Co., Ltd is located in the beautiful and important port city Dalian, We are a professional door and door frame manufacturer.

It has nearly 30 years experience and the occupying area of company is 1, 200, 000 sq. ft., state of manufacturing facility includes manufacturing for nearly 1, 000, 000 sets of door and 1, 000, 000 sets of frame every year. Our company has strong R&D ability and hundreds of advanced equipments.

With a perfect market share and reputation in the domestic market, we set up a selling office and distribution center in Los Angeles and Vancouver, based on the huge demand in America and Canada, Golden House constantly strive to meet the demands of the doors by providing premium products to the customers. The Golden House commitment is to provide superior quality and service, at competitive pricing to our valued customers.



CERTIFICATIONS

Golden House wooden fire rated door tested door and frame according to UL10c; UL10b; NFPA252; UBC 7-2; ASTM E2074; CAN/ULC S104 by UL and Intertek.



WH Intertek 90mins wooden fire door certificate



WH Intertek 90mins steel frame certificate



FM 60mins steel-wooden fire door certificate



FM steel frame certificate



UL 20mins wooden fire door certificate



UL 20mins wooden frame certificate



ISO9001 certificate


SPECIFICATION

Door

Overall 1-3/4" minimum (44.5mm) with solid core in a high density mineral fire board. Door set tested and certified as fire rated from 20 mins to 90 mins. Suitable door set for apartments, offices, hotels, schools, hospitals and commercial buildings. Door surface are based on MDF, veneer, or laminate. All the constructions are usa popular standard.

Frame

Solid wood jamb (fire rated 20 mins) and metal jamb (fire rated 90 mins) available
Adjustable architrave available.
Adjustable metal jamb available.
Hot transfer wooden veneer painting on metal jamb available.
All USA standard anchor on jamb available.

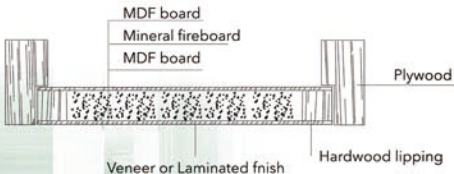

STRUCTURE AND FEATURE

20 minutes, 45 minutes, 60 minutes, and 90 minutes fire rated doors in any design.

Can be designed to match a non fire rated door at 1-3/4" thick.

Any size up to 8'0" height
Single and pair fire doors.

Paint grade or stain grade

Raised panel or flat panel fire doors.

Paint grade or stain grade

Pre-finished in any customized color

Sound STC ratings fire doors

Machining for hinge, lock body, card reader, rim exit devices, and etc.

Fire rated glass optional

20 minute through 90 minutes wood fire rated frame or steel fire rated frame (Paint grade or stained grade)


Mirrored glass and Lumicor architectural resin panels can be substituted for glass

Importantly, our doors remain at the standard 1 3/4" thickness even on 90-minute rating.



Finish

- Flush wood veneer, the structure is consist of MDF/plywood with veneer, stile and rail, solid wood edge, chipboard or mineral fireboard to be inside core, and it can be primer paint or stained painting finish.
- High pressure decorative laminate door
(Visible surface) Same as face material laminated (1.0mm) with edge-before-face construction. Optional edges are: unfinished or finished at factory, and painted at factory with a mill option hardwood edges for staining or painting.
Clearances: 1/8" top, 1/8" lock and hinge stiles. See NFPA-80 6.3.1.7.1, 2013 Edition. Bottom clearance is 3/4" max. (Bottom of the door to top finish floor) See NFPA-80 4.8.4.1, 2013 edition.

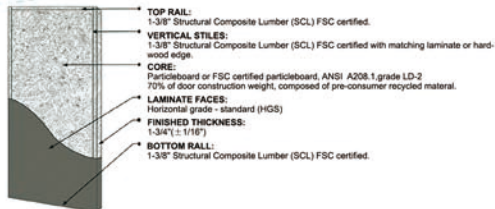

HOLLOW METAL FRAME & SOLID WOODEN FRAME

Hollow metal frame:


Frames are manufactured to accommodate any wall condition, including masonry frame and drywall frame type. A wide variety of frame anchors are available. Width up to and including 40", height up to and including 80"

- Available in knock down frame and welded frame.
- Material have cold roller or galvanized steel
- Steel thickness have 16ga, 14ga
- Fire rating from 45mins to 180mins
- Surface painting can match with wooden door color

Masonry/Stud Construction Frame



Drywall Frame



Solid wooden frame:

GH offers a complete line of non-fire rated and fire rated wooden frames with similar design appearance.

- Available in knock down frame and pre-hung frame.
- Material have fireproof plywood with wood veneer
- Min frame width: 100mm; max frame width: equal to wall thickness
- Fire rating up to 20mins with UL listed



MODEL PICTURE

Painting Finish



Veneer Finish



Laminated Finish



ACCESSORIES



Handle 001



Handle 002



Handle 003



Handle 004



Electronic Lock



Mortise Lock



Dead Lock



Knob Lock



Push And Pull Plate



Press Bar



Single Panic Bar



Double Panic Bar



Ball-bearing Hinge



Spring Hinge



Mounted Closer



Concealed Closer




Kick Plate



Threshold








Viewer





Wire Glass

DOOR AND FRAME HANDING CHART



WOOD FIRE
Doors & Frames

PROJECT CASES

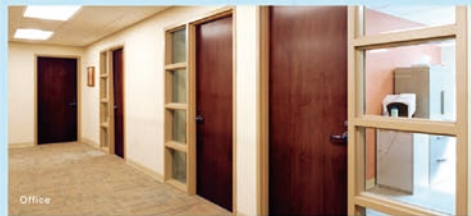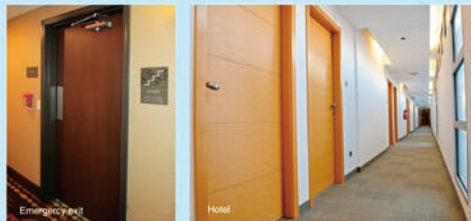

ACHIEVEMENTS

USA:

Watchtower Bible & Tract Society
The Max, Los Angeles, CA 90014
The Lansburgh-Washington D.C.
Avista Hotels

CANADA:

M&A Homes Group Ltd (The Myrida) -Saskatoon

GUAM:

Guam Mayflower High School;
Outpatient Specialty Clinic At
Guam Medical Plaza Building
Dusit Thani Hotel

AFGANISTAN:

Ancop Chamkani, Kabul,
Khwaja Jeer & Adraskan

KUWAIT:

Fire Service Directorate Building of Mishref

U.A.E.:

Bab Al Qasr Hotel
Saadiyat Beach Apartments

ASTANA KAZAKHSTAN:

Service Zone For Citizens
Of Asian Winter Games

KSA:

Zahran Business Center

MACAU:

Sands Macau
Wynn Macau
Galaxy Macau
MGM Macau



Start Here, Towards The World